


Technical details

Temperature range	-10°C ... +60°C
Input range	max. 16 bar
Mounting	vertically
Medium	compressed air according to ISO 8573-1:2010, neutral gases
Materials	Body: zinc diecasting, seals: NBR, inner parts: plastic and brass

Proportional lubricator.



Order code


OK-**-00-0-*001			
Series	←	Versions	→
Connection / Size	←	Digit 1	Bowl
18 G1/8		1	PC
14 G1/4		2	metal
		4	PC with guard

Technical data

Model-no.:	OK-18-...	OK-14-...
Connection	G1/8	G1/4
Flow (Nl/min)	1000	1000
Lubricator operating limit (Nl/min)	28	28
Bowl volume lubricator (cm ³)	35	35
Weight (kg)	0.26	0.25


Lubricator OK

Dimensions

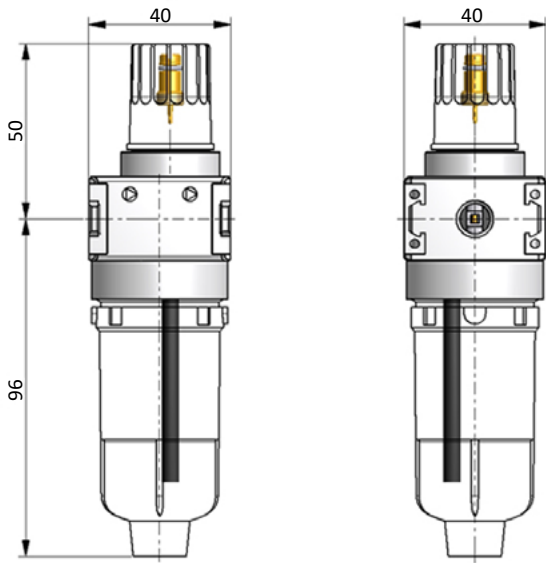

Mounting bracket WK-00

Mounting bracket (set of two pieces) made of PA 66. Mounting only sidewise possible.

WK-00**Coupling kit KPK****KPK-00**